

Product Information Bulletin

Fujicolor Crystal Archive

Album High Definition Paper



1. Features and uses

FUJICOLOR CRYSTAL ARCHIVE ALBUM HIGH DEFINITION PAPER has a thin Glossy or Lustre base which enables the automatic creation of photo book blocks with a special lay flat binding technology and optimal handling of the pages when viewing the photo album.

FUJICOLOR CRYSTAL ARCHIVE ALBUM HIGH DEFINITION PAPER incorporates the High Definition silver halide emulsion technology which delivers enhanced color reproduction, white purity and excellent image stability with a smooth high Glossy and Lustre finish with a specific protection layer resulting in good fingerprint protection.

FUJICOLOR CRYSTAL ARCHIVE ALBUM HIGH DEFINITION PAPER allows the reproduction of a much higher color gamut than electrostatic prints. Digital cameras use the RGB gamut and HD paper is also printed in RGB gamut. As a result, no image quality loss occurs and an automated produced photo album can be viewed with a brilliance as never before.

Features

- Additional protection layer Improves fingerprint resistance and reduces instances of pages sticking together
- Optimal designed thickness Resulting in smooth paper handling
- More vivid color reproduction / wider color range Retains beautiful colors such as subtle shades of green, vivid blues and reds
- More brilliant white and deeper blacks Clearer, more distinct highlight details and deep black

- Excellent image stability

Exhibits excellent image stability during long term dark and light storage conditions, as well as storability with respect to nitrogen oxide, ozone and other gases

2. Safelight

Handle in total darkness. If safelight use is unavoidable, observe the following precautions.

- Expose paper no longer than 1 minute to light emitted through two Fuji Safelight Filter No. 103A (or Wratten Safelight Filter No. 13) in a 10 watt tungsten lamp safelight located at least 1 meter from the work area.
- Safelight filters fade with extended use and need regular checking. Replace when paper fogging is detected.
- Exposed paper is susceptible to safelight induced sensitivity increases in the exposed area. For this reason, exposed paper should be subjected as little as possible to safelight illumination.

3. Pre-processing paper handling / storage

The higher the temperature and humidity, the more paper, whether unexposed or exposed, is susceptible to adverse changes in speed, color balance, physical characteristics and other properties. Unprocessed paper is best stored at low temperatures. Specifically, the following conditions should be used for paper storage.

- Short term storage: Store in a cool and dark location, away from direct sunlight, high temperature and high humidity
- Long term storage: Below 10°C (50°F)

Raw paper which has been stored at a low temperature (by refrigeration) should be set aside and allowed to warm to room temperature prior to being opened. If the paper is taken out of its packaging immediately after being removed from refrigerated storage, condensation will be formed on the paper surfaces, resulting in print color changes and easily damaged surfaces.

The minimum temperature equalization periods are as follows.

20°C (68°F) Temperature Equalization Periods

Unit: hours

Storage Temperature	-20°C (-4°F)	0°C (32°F)	10°C (50°F)
Paper Size			
10.2cm x 186 m (4 in. x 610 ft.)	6	5	3.5

- NOTES**
- Do not heat paper in order to equalize temperatures.
 - Remove paper from refrigeration one day before use.

If exposed paper remains unprocessed for extended periods of time under normal room conditions or is subjected to high temperature and/or high humidity, changes in the color balance and other properties may occur. The time between exposure and development should be fixed in order to obtain consistent quality. Avoid waiting until the next day to develop the exposed paper. Rather than holding the paper for processing the next day, initiate processing as soon as possible.

4. Printing and processing

This paper is designed for use with Fujicolor Paper processing chemicals as CPRA and RA4 type processes. The paper characteristics are optimized for printer systems as mentioned in section 17 Calibration data.

This paper is not advised for use in minilab systems.

5. Control strips

Processing control can be provided through the use of FUJICOLOR CRYSTAL ARCHIVE PAPER Control Strips Process CP-40FA/43FA/47L/48S and 49E.

6. Post –processing print handling / storage

FUJICOLOR CRYSTAL ARCHIVE ALBUM HIGH DEFINITION PAPER is a thin paper. This paper is recommended to be used under specific environmental conditions. The recommended environmental conditions for post processing are:

- Temperature within 17 - 27°C
- Relative Humidity within 40 - 75%

Since prints are usually used for the long term recording of images, as much effort as possible is made to use materials that exhibit the least amount of change overtime. The effects of high force during folding, light, heat, oxygen in the air, contaminating gases, humidity and mold cannot be completely avoided. It is advised to use low forces during assembling the album. Also the change in the photographic image or base material are minimized by maintaining the appropriate storage conditions for prints, such as those used by museums and art galleries. Temperature and humidity control is the most important key to minimizing the change that occurs in prints. Prints stored in the dark under the following conditions may be expected to show almost no change over time.

Storage period with almost no change	Temperature	Relative Humidity
More than 20 years	Below 10°C (50°F)	30% — 50%
10 — 20 years	Below 25°C (77°F)	30% — 50%

Notes on Prints Storage:

Even during normal storage, it is recommended that photobooks should be stored at a place as free as possible from hot and humid conditions, and away from direct illumination. The following are examples of undesirable storage conditions.

- Storage in a room closet facing a wall exposed to cold outside air (which may cause condensation).
- Storage in a place near the ceiling, such as an attic, the top of a closet or cupboard (where high temperatures may occur).

7. Light sources for viewing

When inspecting finished color prints, it is essential that an illumination source will be used that has superior spectral characteristics, adequately high color temperature and sufficient brightness. This is because results can appear different, depending on light quality. For precise results, prints should be examined under the conditions designated by ISO 3664-2009. As a general guide, the following conditions are recommended.

Color Temperature : 5000 ± 300 K
 Average Illumination : 500 Lux or more
 General Color Rendering Index : Ra 90 or more*

* To attain these values, special fluorescent lamps designed for color evaluation (e.g. EDL type) should be used.

When inspecting finished prints be careful to shut out all external light and colored reflected light.

8. Paper surface available


FUJICOLOR CRYSTAL ARCHIVE ALBUM HIGH DEFINITION PAPER is available in Glossy and Lustre surface.

9. Back printing

This product has no back printing.

10. Markings (Box/Emulsion numbers)

10.1 Box markings

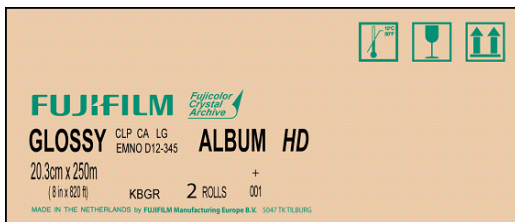

“+” indication: spliced baby roll is/are packed.

10.2 Bag labelling



“+” indication means that a splice is present in the baby roll.

10.3 Emulsion numbers

Emulsion numbering will be in ascending order from Dyx-xxx at introduction.

Note:

FUJICOLOR paper is marked with a three digit emulsion number followed by an additional three digit number which is provided for production control purpose only. Should any problem arise with FUJICOLOR CRYSTAL ARCHIVE ALBUM HIGH DEFINITION PAPER, the additional three digit number suffix to the emulsion number should be indicated on the claim.

11. Product FSC certification

FSC certification is available from 01-12-2017

12. Technologies incorporated in this paper


11.1 Base paper technology

Special designed base paper having unique characteristics is used for this product. Optimized paper thickness will result in improved leafing through of photo albums with double sided pages.


11.2 X-Coupler Technology

Through the incorporation of a latest designed cyan coupler (X-Coupler Technology), which features a molecular structure developed by Fujifim's proprietary technologies, this paper is capable of reproducing colors of high purity, such as vibrant blues and reproducing the subtle shades of green and of forming reds.

13. Spectral dye density curves

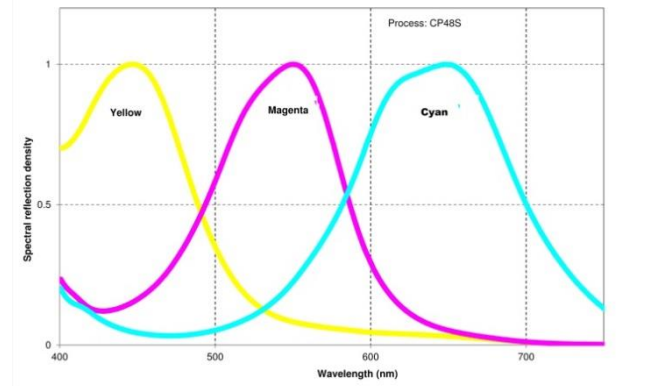


14. Spectral sensitivity curves

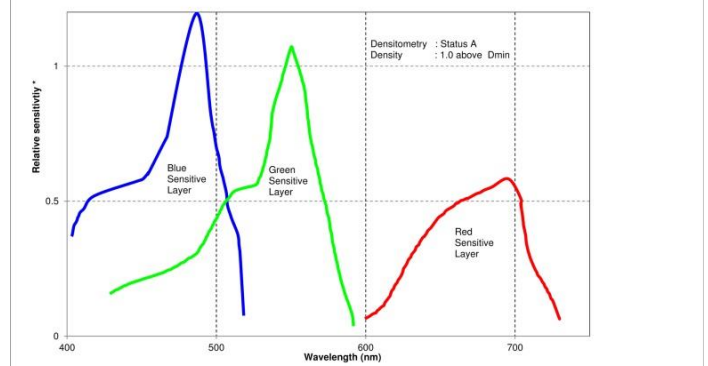

* Sensitivity equals the reciprocal of the exposure (μcm^2) requires to produce a specified density

15. Paper structure

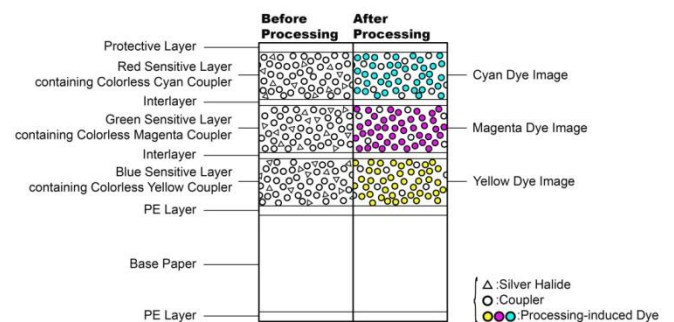

16. Sizes available

Length \ Width	Box packaging		BULK packaging		
	120 m (394 ft)	230 m (755 ft)	250 m (820 ft)	550 m (1804 ft)	600 m (1968 ft)
10.2 cm (4 in.)					■
12.7 cm (5 in.)		■		■	
17.8 cm (7 in.)			■		
20.3 cm (8 in.)		■	■		
22.0 cm (8.6 in.)		■	■		
25.4 cm (10 in.)		■			
30.5 cm (12 in.)		■	■		
40.6 cm (16 in.)	■				
50.8 cm (20 in.)	■				

17. Calibration data

Fuji Crystal Archive Album HD paper

Equipment		Software	Calibration data			
Brand	Name		LUT + Target density RGB Glossy / Lustre	Basic calibration ymcd	Intermittance rgb	Thickness
ISAG	Fastprint		2.20 / 2.20 / 2.10	n.a.	n.a.	0.17
	Wideprint 8", 12"					
	Wideprint R2R		174	n.a.	n.a.	n.a.
ZBE Chromira	SE, Pro, R2R		2.20 / 2.20 / 2.10	n.a.	n.a.	n.a.
Polelettronica	Laserlab 50/76/127		Printer defines own and highest possible Dmax settings (exposure vs chemistry relation)			
Durst	Epsilon		2.20 / 2.20 / 2.10	0.004 / 0.056 / 0.000 / 0.920	90 / 50 / 37	n.a.
	Zeta					
	Theta 50/51			170.2 / 112.0 / 0.0 / 104.3		
	Theta 76/76HS			0.006 / 0.085 / 0.000 / 1.325	101 / 56 / 42	
	Lambda			124.0 / 95.8 / 0.0 / 129.0		

All recommended Dmax values can only be reached when using high active chemistry equal to Fujifilm CPRA Digital Pro AC
For competitive and recycling chemistry the Dmax should be reduced with -0.10 density
Media target and ICC Profile location: <https://www.fujifilm.eu/eu/support/photofinishing/color-management>

18. Technical Support

In case abnormalities are found when using this FUJICOLOR CRYSTAL ARCHIVE ALBUM HIGH DEFINITION PAPER please contact your local Fujifilm subsidiary and/or distributor.

Relevant Fujifilm subsidiary and/or distributor contact information can be found on the following internet address:
<http://www.fujifilm.com/worldwide/>

Notice: The data herein published were derived from materials taken from general production runs. However changes in specification may occur without notice

FUJIFILM

FUJIFILM Europe B.V.
PO box 600
5000 AP Tilburg
The Netherlands

©Technical Market Support
April 2019

Document nr: AF3-0234E3