

PRODUCT INFORMATION BULLETIN

Fujicolor Crystal Archive Professional Textured Paper Canvas / Linen



1. Features and uses

FUJICOLOR CRYSTAL ARCHIVE PROFESSIONAL TEXTURED PAPER is a new silver halide color paper specially designed to extend the current line-up.

The Textured paper has unique surface designs; Canvas Glossy and Matte, Linen Glossy and Leather Glossy.

The Textured paper incorporates the professional silver halide emulsion technology which delivers enhanced color reproduction, white purity, excellent image stability and good fingerprint protection.

The Textured paper is suitable for a wide range of unique premium products, such as wall decoration (framed or mounted), photo book (canvas glossy preferred) and greeting cards

Features

- | | |
|---|---|
| • Textured surface | Canvas Glossy and Matte, Linen Glossy and Leather Glossy. |
| • Textured surface | Surface less fingerprint sensitive |
| • Optimal designed thickness properties | Resulting in smooth paper handling |
| • Vivid color reproduction / wide color range | Retains beautiful colors such as subtle shades of green, vivid blues and reds |
| • Brilliant white and deeper blacks | Clearer, more distinct highlight details and deep black |
| • Excellent image stability | Exhibits excellent image stability during long term dark and light storage conditions, as well as storability with respect to nitrogen oxide, ozone and other gases |

2. Safelight

Handle in total darkness. If safelight use is unavoidable, observe the following precautions.

- Expose paper no longer than 1 minute to light emitted through a Fuji Safelight Filter No. 103 (or Wratten Safelight Filter No. 13) in a 10 watt tungsten lamp safelight located at least 1 meter from the work area
- Safelight filters fade with extended use and need regular checking. Replace when paper fogging is detected.
- Exposed paper is susceptible to safelight-induced sensitivity increases in the exposed area. For this reason, exposed paper should be subjected as little as possible to safelight illumination.

3. Pre-processing paper handling / storage

The higher the temperature and humidity, the more paper, whether unused, unexposed or exposed, is susceptible to adverse changes in speed, color balance, physical characteristics and other properties. Unprocessed paper is best stored at low temperatures. Specifically, the following conditions should be used for paper storage.

- Short term storage: Store in a cool and dark location, away from direct sunlight, high temperature and high humidity
- Long term storage: Below 10°C (50°F)

Raw paper which has been stored at a low temperature (by refrigeration) should be set aside and allowed to warm to room temperature prior to being opened. If the paper is taken out of its packaging immediately after being removed from refrigerated storage, condensation will form on the paper surfaces, resulting in print color changes and easily damaged surfaces.

The shortest periods required to return freezer or refrigerator stored paper to room temperature (minimum temperature equalization periods) are as follows.

20C (68°F) Temperature Equalization Periods
Unit: hours

Paper Size	Storage Temperature		
	-20°C (-4°F)	0°C (32°F)	10°C (50°F)
127cm x 50m (50 in. x 164 ft.)	8	10	5

Notes

- Do not heat paper in order to equalize temperatures.
- Remove paper from refrigeration one day before use.

If exposed paper remains unprocessed for extended periods of time under normal room conditions or is subjected to high temperature and/or high humidity, changes in the color balance and other properties may occur. The time between exposure and development should be fixed in order to obtain consistent quality. Avoid waiting until the next day to develop the exposed paper. Rather than holding the paper for processing the next day, initiate processing as soon as possible.

4. Printing and processing

This paper is designed for use with Fujicolor Paper Process chemicals such as CP-48S, CP49E or RA4 type processes.

Combining this paper with Fuji chemicals results in many advantages including faster processing, greater processing stability, reduced contamination hazards, greater ease in solution preparation and higher quality.

The paper characteristics are optimized for printer systems as mentioned in section 19 Calibration data.

In general more calibration might be required to reach the calibration OK result, caused by the high scattering of light (rough surface) during calibration strip measurement.

A special tape splice method, using double sided tape and overlapping the belt and paper, is recommended on VSP type processors.

Dryer setting of processor might be increased by 5°C (or in some cases higher depending on the initial temperature level). This increase in dryer temperature is especially recommended on R2R processors.

5. Control strips

Processing control can be provided through the use of FUJICOLOR CRYSTAL ARCHIVE PAPER Control Strips Process CP48S/49E.

6. Post-processing

Prints should be handled with care to avoid damages on the print.

7. Print and Photo Album Storage

Since prints are usually used for long term recording of images, as much effort as possible is made to use materials that exhibit the least amount of change overtime. The effects of high force during folding, light, heat, oxygen in the air, contaminating gases, humidity and mold cannot be completely avoided. It is advised to use low forces during assembling the album. Also the change in the photographic image or base material are minimized by maintaining the appropriate storage conditions for prints, such as those used by museums and art galleries. Temperature and humidity control is the most important key to minimizing the change that occurs in prints. Prints stored in the dark under the following conditions may be expected to show almost no change over time.

Storage period with almost no change	Temperature	Relative Humidity
> 20 years	Below 10°C (50°F)	30% — 50%
10 — 20 years	Below 25°C (77°F)	30% — 50%

Notes on Prints Storage:

1. Prints should be mounted, or placed into a bag (plastic*) for photographic prints before being stored.

* Made of polyester, polystyrene or polypropylene plastic, etc

2. Even during normal storage, it is recommended that prints be stored at a place as free as possible from hot and humid conditions, and away from direct illumination.

Notes on Photo Album storage:

When prints have been assembled and mounted, it is recommended to store the album at a place as free as possible from hot and extreme humid conditions, away from direct (sun)light. The following are examples of undesirable storage conditions.

- Storage of the album at a temperature higher than 50°C and/or 70% RH.
- Storage storing close to an outside wall or exposed to cold outside air may cause condensation.
- Storage in a place near the ceiling, such as an attic, the top of a closet or cupboard (where high temperatures may occur).

8. Light sources for viewing

When inspecting finished color prints, it is essential that an illumination source be used that has superior spectral characteristics, adequately high color temperature and sufficient brightness. This is because results can appear different, depending on light quality. For precise results, prints should be examined under the conditions designated by ISO 3664-2009. As a general guide, the following conditions are recommended.

Color Temperature : 5000 ± 300 K
 Average Illumination : 500 Lux or more
 General Color Rendering Index : Ra 90 or more*

* To attain these values, special fluorescent lamps designed for color evaluation (e.g. EDL type) should be used.

When inspecting finished prints, be careful to shut out all external light and colored reflected light.

9. Paper surfaces available

FUJICOLOR CRYSTAL ARCHIVE PROFESSIONAL TEXTURED PAPER is available in Canvas Matte and Linen.

10. Paper thickness available

	Thickness um
Canvas Matte Paper	275
Linen Glossy Paper	235

11. Back printing

This product has no backprinting.


12. Markings (Box/Emulsion numbers)

12.1 Box markings



“+” indication means that at least 1 spliced baby roll is packed.

12.2 Bag labelling

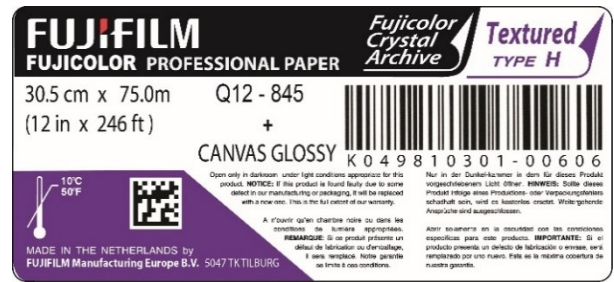

“+” indication means that a splice is present in the babyroll.

12.3 Emulsion numbers

Emulsion numbering will, at introduction, be in ascending order from:

5xx-xxx : Canvas Matte Type H
 Qxx-xxx : Linen Type H

Note FUJICOLOR paper is marked with a three digit emulsion number followed by an additional three digit number which is provided for production control purpose only. Should any problem arise with FUJICOLOR CRYSTAL ARCHIVE PROFESSIONAL TEXTURED PAPER, the additional three digit number suffix to the emulsion number should be indicated on the claim.

13. Technologies incorporated in this paper


13.1 Base paper technology

Specially designed base paper having unique characteristics is used for this product. Optimized paper thickness will result in improved leafing through of photo albums with double sided pages.


13.2 X-Coupler Technology

Through the incorporation of a latest designed cyan coupler (X-Coupler Technology), which features a molecular structure developed by Fujifilm's proprietary technologies, this paper is capable of reproducing colors of high purity, such as vibrant blue and reproducing the subtle shades of green and of forming reds.


14. Spectral dye density curves

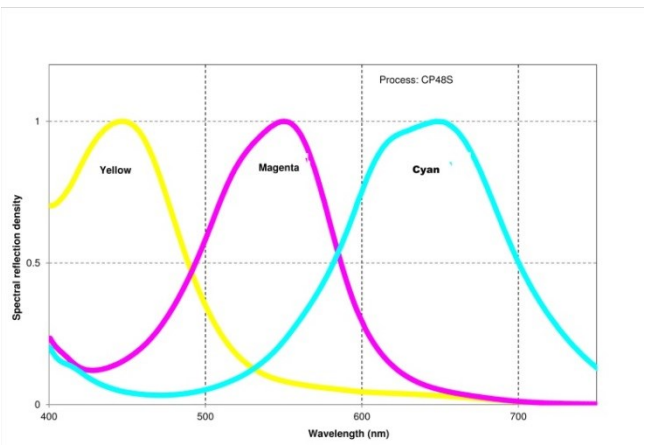

15. Spectral sensitivity curves

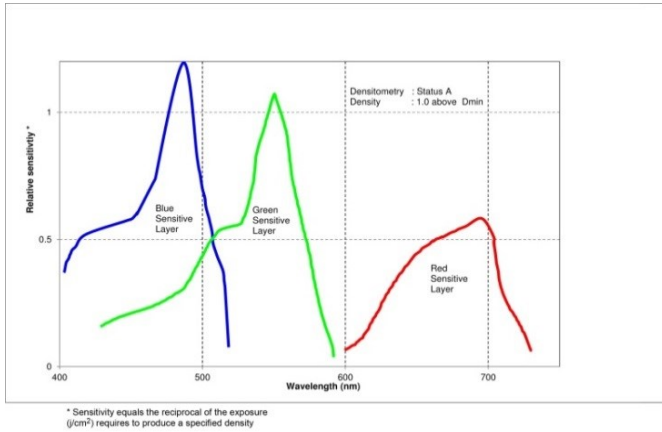

16. Paper structure

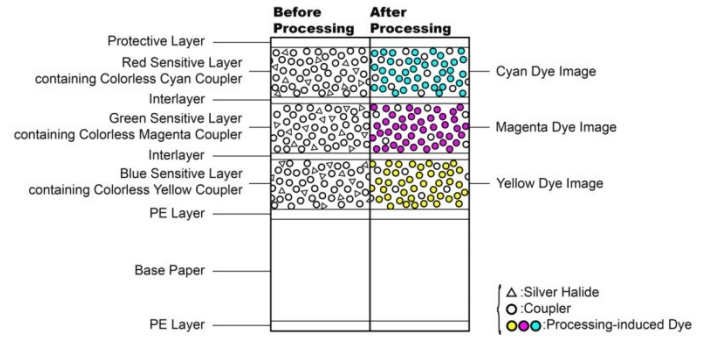

17. Sizes available

	Canvas			Linen	
	Box packaging			Box packaging	
Length	50m	75m	150m	50m	83.8m
Width	(164 ft)	(246 ft)	(492 ft)	(164 ft)	(275 ft)
15.2 cm (5 in.)			X		
20.3 cm (8 in.)		X			X
25.4 cm (10 in.)		X			X
27.9 cm (11 in.)		X			X
30.5 cm (12 in.)		X			X
50.8 cm (20 in.) OUT		X			X
76.2 cm (30 in.) IN	X			X	

Note: Size availability may change without prior notice. Availability depends on surface

18. Calibration data

Fujicolor Crystal Archive Professional Textured Paper

Equipment			Calibration data				
Brand	Name	Latest Software	LUT + Target density RGB		Basic calibration ymcd	Intermittance rgb	Thickness
			Linen Type H	Canvas Matte Type H			
Frontier	3 series	Installer R	LUT B, surface Matte	LUT F, Other 1	n.a.	n.a.	n.a.
	5 series	Installer R		LUT J, Other 1			
	7 series	V 4.01		LUT J-4, Other 1			
Noritsu	QSS 28x ~ LP24Pro	Vol.2 7.20	160	187	n.a.	n.a.	n.a.
	QSS 35, 37, 38, 39 series	Vol.3 N4.54					
Agfa	DLab 1, 2, 3		** 2.20 / 2.05 / 2.05	n.a.	0.97 / 1.00 / 1.02	n.a.	n.a.
KIS	DKS 15x, 16x, 17x		Printer defines own and highest possible Dmax settings (exposure vs chemistry relation)				
ISAG	Fastprint		2.25 / 2.25 / 2.15	1.45 / 1.45 / 1.40	n.a.	n.a.	Type H = 0.27
	Wideprint 8", 12nG						Type S = 0.20
	Wideprint 12"						n.a.
ZBE Chromira	SE, Pro Lab, R2R		2.10 / 2.10 / 2.00	*** 1.45 / 1.45 / 1.40	n.a.	n.a.	n.a.
Polielettronica	Laserlab 50/76/127		Printer defines own and highest possible Dmax settings (exposure vs chemistry relation)				
**** Durst	Epsilon		2.25 / 2.25 / 2.15	1.45 / 1.45 / 1.40	0.004 / 0.056 / 0.000 / 0.920	90 / 50 / 37	n.a.
	Zeta				170.2 / 112.0 / 0.00 / 104.3		
	Theta 50/51				0.006 / 0.085 / 0.000 / 1.325	101 / 56 / 42	
	Theta 76/76HS				124.0 / 95.8 / 0.00 / 129.0		
	Lambda						
OCE Lightjet	430 / 500XL / 5000		Media target can be downloaded from the Fujifilm Europe .eu website				

All recommended Dmax values can only be reached when using high active chemistry equal to Fujifilm CPRA Digital Pro AC and Fujifilm ADM chemistry For competitive and recycling chemistry the Dmax should be reduced with -0.10 density

* To be able to calibrate the Canvas Matte, Type H product a special procedure is necessary. Please contact technicalsupport@fujifilm.eu for more details
OCE Lightjet media target location: http://www.fujifilm.eu/support/photofinishing/color-management/ICC_Profile_for_OCE_Lightjet

** The Agfa DLab has a non status A densitometer. The actual measured densities are different from status A. This mis-measurement has been corrected in the advised Dmax settings.

*** When using the old generation Chromira Pro Lab processor processing streaks occur at the end of the print (cross-over rack streaks)

**** Due to the canvas paper surface the LED balance will be calibrated between 20 - 30% (normally < 10% is acceptable)

When the cut mark will not be detected the initial value for the cut mark ref. reflective media must be adjusted. This initial value should be changed according to the following software steps:
In the main Durst Theta software go to: Special - Init Values and Special Theta Control - Cut mark ref. reflective media. Change this setting to a value between 3500 and 3900.

***** Depending on equipment settings (dryer temperature adjustment) it is possible to use this paper on minilab systems.

19. Technical Support

In case abnormalities are found when using this FUJICOLOR CRYSTAL ARCHIVE PROFESSIONAL TEXTURED PAPER please contact your local Fujifilm subsidiary and/or distributor.

Relevant Fujifilm subsidiary and/or distributor contact information can be found on the following internet address:
<http://www.fujifilm.com/worldwide/>

Notice: The data herein published were derived from materials taken from general production runs. However changes in specification may occur without notice

FUJIFILM

FUJIFILM Europe B.V.
PO box 600
5000 AP Tilburg
The Netherlands

©**Technical Market Support**
February 2022

Document nr: AF3-0247E6